



## INSTALLATION SUPPLEMENT


### **LEGAMAX Premium**

**07/12- NISSAN GT-R R35 VR38DETT**

Part No: 31021-KN001

9.25.2008

#### NOTICE

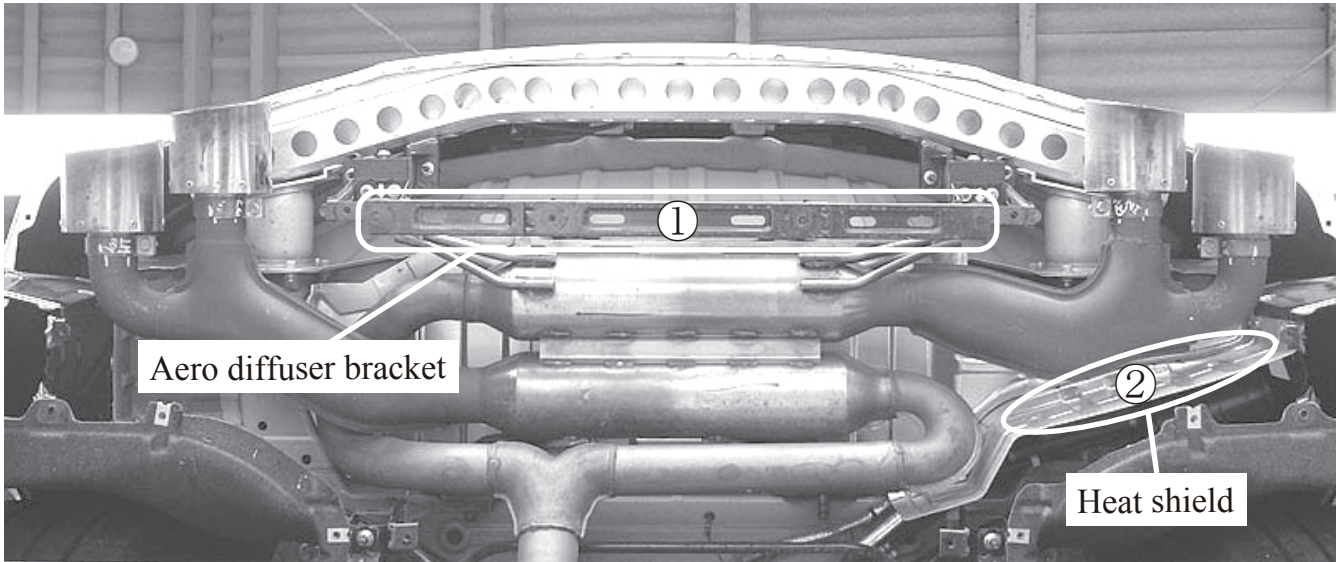

1. The clearance over 10 mm needs to be maintained by bending of Heat shield for the front pipe of right tips not to be close to Heat shield.
2. The circumference of HKS exhaust system would get high temperature in according to running condition. It is recommended removing a resinated netlike part attached the rear bumper to obviate transformation of the resinated netlike part by heat when you run at a circuit.
3. It is possible to install Aero diffuser bracket after installing HKS exhaust system but it is suggested to remove Aero diffuser bracket because the clearance between this product and Aero diffuser bracket would get small by vehicular error or dispersion of this product.